



IULDUG Annual Conference

September 12th, 2012



ULD Definition


- A loading device.
- A tool to generate profit

Our Concern

- Very expensive – do NOT damage it
- Various ULD specification, pivot weight, loading weight, tare weight



Process Flow

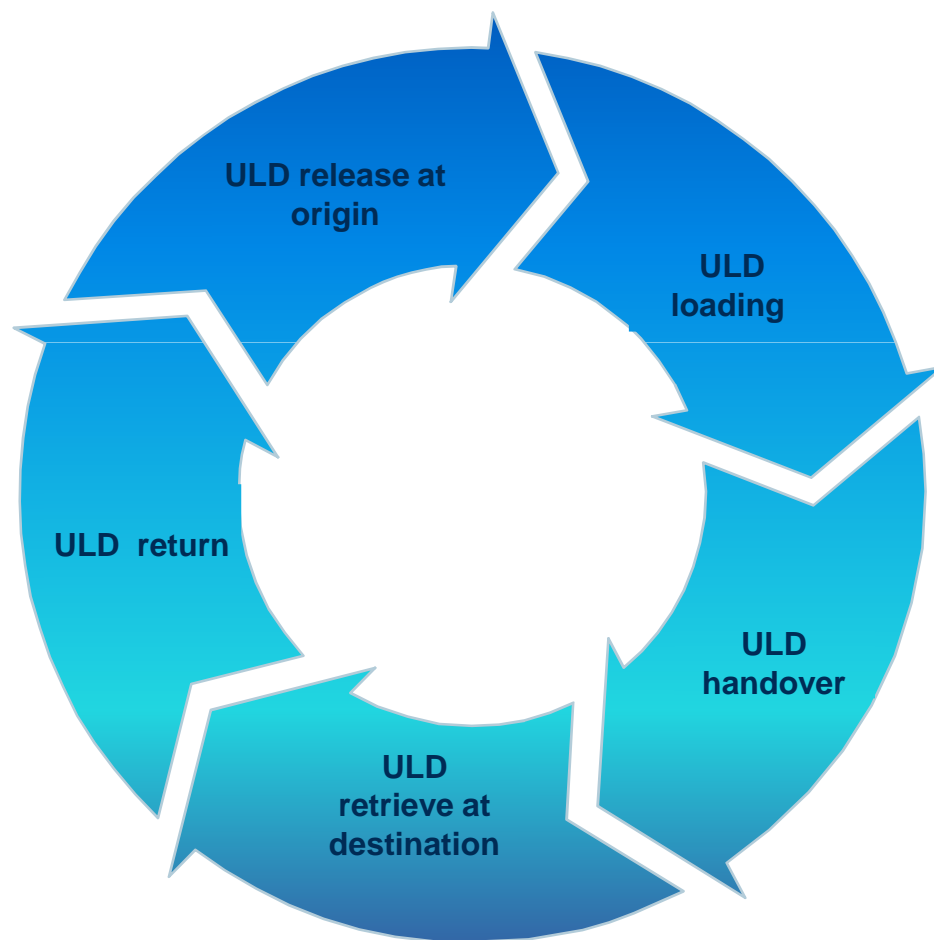

What Could be Better...

- Sufficient supply and efficient stock management.
 - ✓ ULD release delay
 - ✓ Average 3-5 days booking in advance for special equipment




What Could be Better...

- Regulate ULD specification



What Could be Better...

- Standardized ULD tare weight

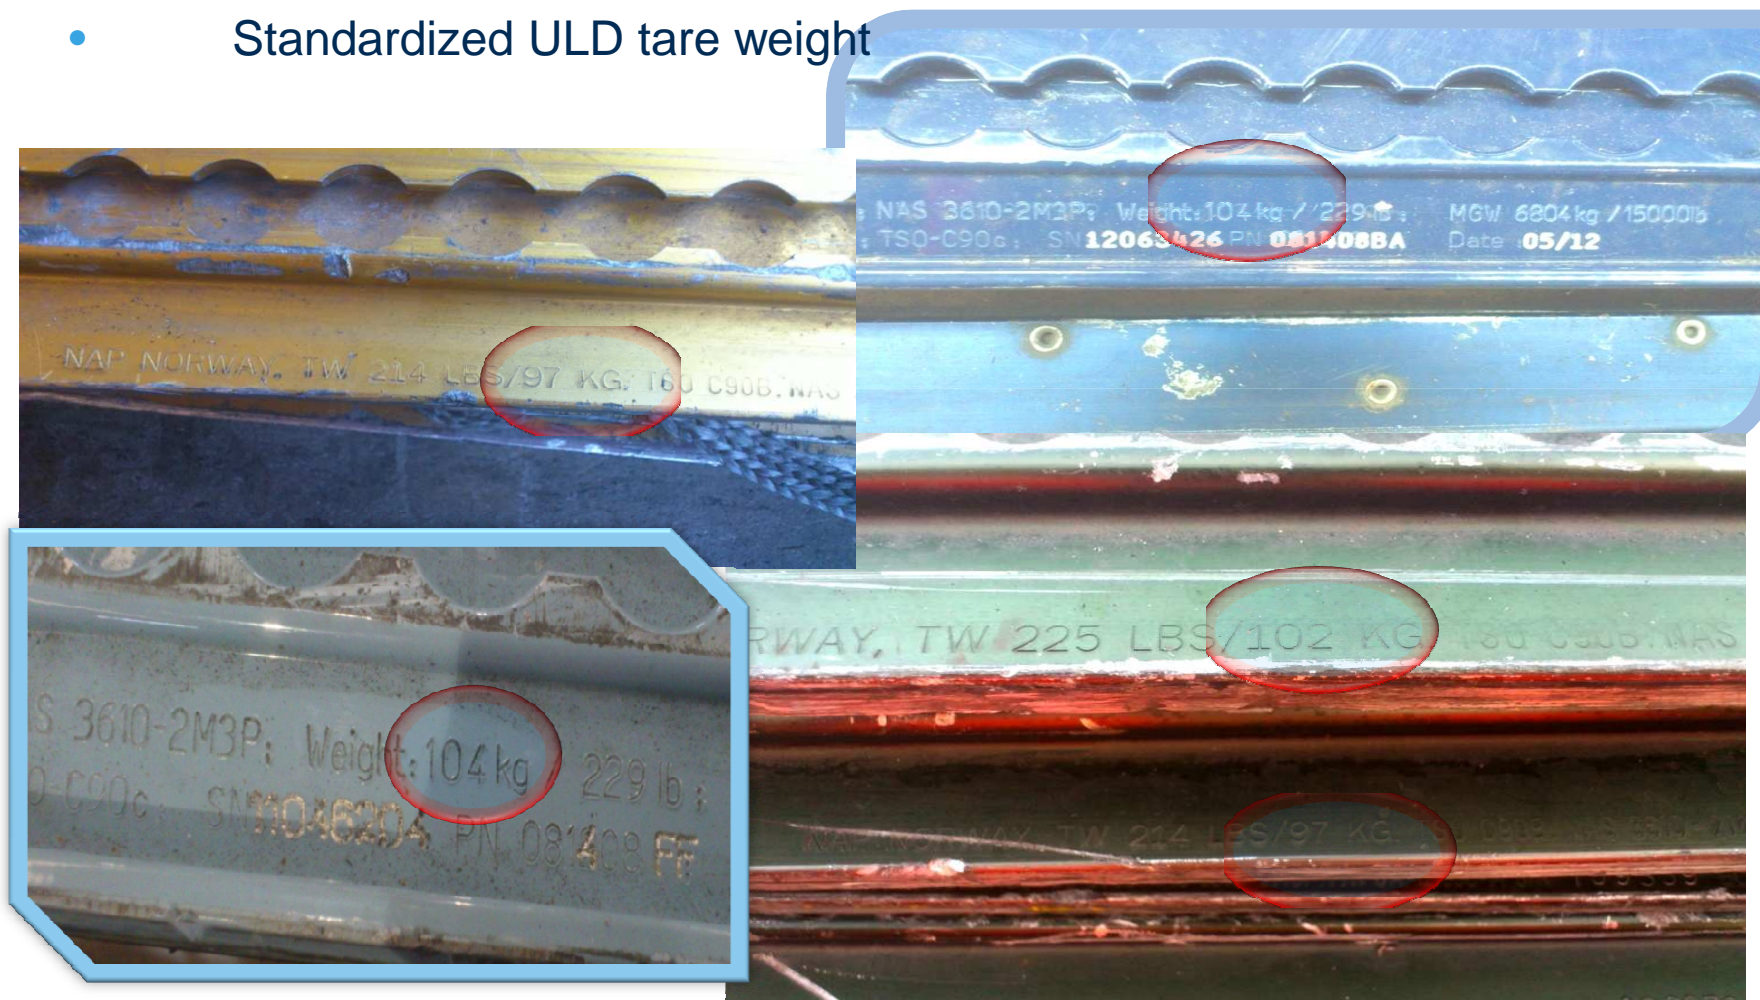

What Could be Better...

- Unified ULD accessories





What Could be Better...

- Regular training by qualified personnel
- Training material in local language



ULD Technical Manual

Section 1: Storage of ULDs


RECOMMENDED that:

In order to minimize and eliminate possible damage or mishandling occurring while Unit Load Devices (ULDs) are handled and stored at airport ramps, or within the facilities of ground handling agents, cargo terminal operators, freight forwarders, shippers, truckers and other parties involved in ULD operations, and to safeguard the interests of all parties, the procedures outlined below shall be followed by all parties having operations that involve ULDs.



- Share ULD tracking & tracing via on-line system
- Better cargo flow visibility

Online Tracking



Air Waybill Number *

123 - 12345678

What Could be Better...

- Invent new ULD accessories to enhance cargo security



- ☐ Secured
- ☐ Reusable
- ☐ Environmental friendly
- ☐ Cost effective

Goal

- Industry wide regulatory compliance
- High Operating Standards for ULD
- Reducing ULD associated risk





Thank You!

Kuehne + Nagel China Limited

Address: Life Hub at Daning

Office Tower, Block 1, 11-16F

1868 Gong He Xin Road

Zhabei District

Shanghai 200072, P.R. China

Email: knsha.airlogistics.inquiry@kuehne-nagel.com